GTE

RACK & DATA CABINET

ISO 9001:2015 MSCB-159 C E DIN UL ANSI American National Standards Institute IEEE Advancing Technology for Humanity

Wall Mounted | Free Stand

General

GTE Data Cabinets & Racks are Born from an innovative while you benefit from integrated engineering solutions based on top-quality system components, component data, system know-how and design expertise throughout every aspect of GTE cabinets. It is a "state of the art" cabinet that satisfy the needs of structured cabling, as well as IT and video surveillance.

Features:

- 19" Well designed frame with precise dimensions.
- Toughened glass front door with door border and steel Side door.
- Several Cable Entries on top cover and bottom Panel with adjustable sizes.
- Meeting requirements of under-Base Cable entry/ventilation and prevention.
- Removable Side Panels, easy to install and maintain
- Standing or wall mounting installation
- Adjustable feet and heavy duty castors are optional
- Easy mounting installation.
- Adjustable feet as standard; castors, lockable castors, plinth,
- plinth with filter optionally
- GND/earthling kit.
- Racks can be installed in blocks

Standards:

Comply with ANSI/EIA RS-310-D , IEC297-2 , DIN41491;Part1 , DIN41494;Part7 , GB/T3047.2-92 & EIA Standard

Loading Capacity:

Static Loading: up to 220 Kg for Wall Mounted and up to 1250 Kg for Free Stand

Degree of Protection:

Standard protection rating IP20
IP40 on Request

Material:

Cold Rolled Steel 1.2mm & 1.5mm for WM
1.5mm & 2.0mm for FS

Surface Finishing:

Power coated with RAL Color7032 , 7035 , 7038 ,9003 , 9005 and others.

Cable Entry

Bottom and/or Top , rear door

Wall Mounted Cabinets & Data Racks

✚ Wall Mounted Cabinets

Cabinet Size	Width "W"	Depth "D"	Height "H"	Model No.
4U	600	450	200	GE-Y-WM-4U-6-4
	600	600		GE-Y-WM-4U-6-6
6U	600	450	350	GE-Y-WM-6U-6-4
	600	600		GE-Y-WM-6U-6-6
9U	600	450	480	GE-Y-WM-9U-6-4
	600	600		GE-Y-WM-9U-6-6
12U	600	600	615	GE-Y-WM-12U-6-6
	600	800		GE-Y-WM-12U-6-8
15U	600	600	750	GE-Y-WM-15U-6-6
	600	800		GE-Y-WM-15U-6-8
	800	600		GE-Y-WM-15U-8-6
18U	600	600	880	GE-Y-WM-18U-6-6
	600	800		GE-Y-WM-18U-6-8
	800	600		GE-Y-WM-18U-8-6
20U	600	600	970	GE-Y-WM-20U-6-6
	600	800		GE-Y-WM-20U-6-8
	800	600		GE-Y-WM-20U-8-6
22U	600	600	1015	GE-Y-WM-22U-6-6
	600	800		GE-Y-WM-22U-6-8
	800	600		GE-Y-WM-22U-8-6
24U	600	600	750	GE-Y-WM-24U-6-6
	600	800		GE-Y-WM-24U-6-8
	800	600		GE-Y-WM-24U-8-6

Front Door	Side Door
Solid Steel	Solid Steel
Glass	Semi – Perforated
Fully Perforated	
Semi- Perforated	

Main Structure
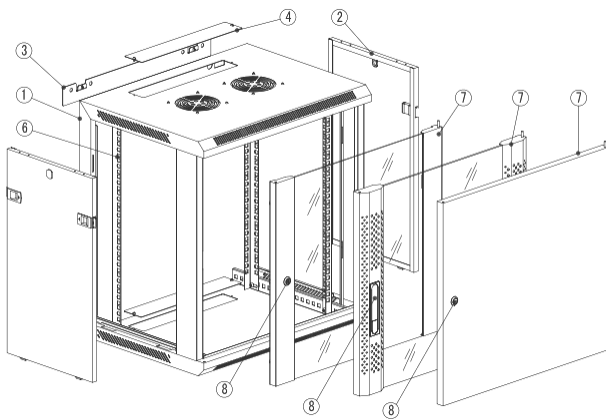
1. Frame
2. Side panel
3. Mounting panel
4. Cable entry cover
5. Fan cover
6. Mounting profile
7. Front door
8. Lock

Lockable fan holes and cable entry

Removable side panels (side locks optional)

Mounting panel (Option)

Inside fixation by nuts to avoid accident

Wall Mounted Cabinets & Data Racks

GTE

Cable Management

Horizontal Cable management for ease patching
Vertical Cable Management for FS cabinets

Power Strip

Different Types of PDU as per request
- Universal Socket (Standard)
- UK Socket

Vented
Flat Shelf

Flat Shelf

Center Mount
Cantilever Shelf

Vented
Cantilever Shelf

Cantilever Shelf

Shelves
a) Fixed
b) Telescopic
- Made of 2 mm sheet steel
- Whole surface is perforated for effective
- Ventilation

Fan Tray
Easy assembled to the top sheet with on/off switch, thermostat for temperature control. Long life, quiet and reliable.
No. of fan :
1 Fan
2 Fan
4 Fan